

FIBER FILM ALPHA-GP

Product Overview


Fiber Film is a novel, high efficiency stretch film with reinforcement elements (fibers) that increase tear resistance.

Fiber Film Alpha-GP operates with Semi -Automatic Wrapping Machines with Brake Tension System.

Fiber Film Alpha-GP is designed for General Purpose applications and usually replaces a stretch film of $18\mu m$ to $20\mu m$ thickness.

Alpha-GP is applied to various load types providing:

- √ Worry free performance: Place it Forget it!
- √ No breakages during palletization
- ✓ Exceptional load retention & stability

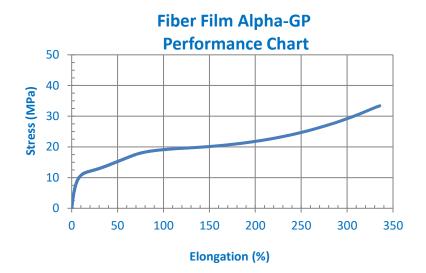

The graph above illustrates how the film performs under an increased load. Where the line ends indicates where the film breaks.

Technical Specifications		
		TOLERANCE
Tensile strength at break (N/mm²)	30,3	10%
Elongation at break (%)	267	10%
Film width (mm)	485	2%
Film Weight (gr/m)	5,2	5%

Pallet dimensions: 80cm x 120cm x 115cm

Packaging Specifications		
Gross Roll Weight* (kg)	12,6	
Film Length per roll** (m)	2100	
Roll Diameter (O.D.)*** mm	228	
Core diameter (mm)	76	
Core Weight (kg)	1,7	
Rolls per pallet	36	
Net Pallet Weight *(kg)	453	
Weight Tolerance*	±5%	
Length Tolerance**	±2%	
Roll diameter Tolerance***	±2%	

V. 10_2017

